


Please refer to relevant product installation instructions for comprehensive installation process

Studio 2 & 3 BF (**PR2411NZ**) Studio Duplex BF (**PR2016NZ**)

The **Gazco Cool Wall Kit** is designed to allow the warm convected air at the front of the appliance to be directed behind the finished wall above the appliance. The component is required if artwork or a TV (wall mounted only - not recessed) is going to be mounted above the appliance. The optional **Gazco Warm Air Ducting Kit** is designed to maximise the heat of the appliance back into the room and is highly recommended if heat is an important requirement. To complete the finished appearance of a gib board wall, plastered and painted above the appliance, the optional **Black Trim Frame** is available in **20mm** or **50mm**.

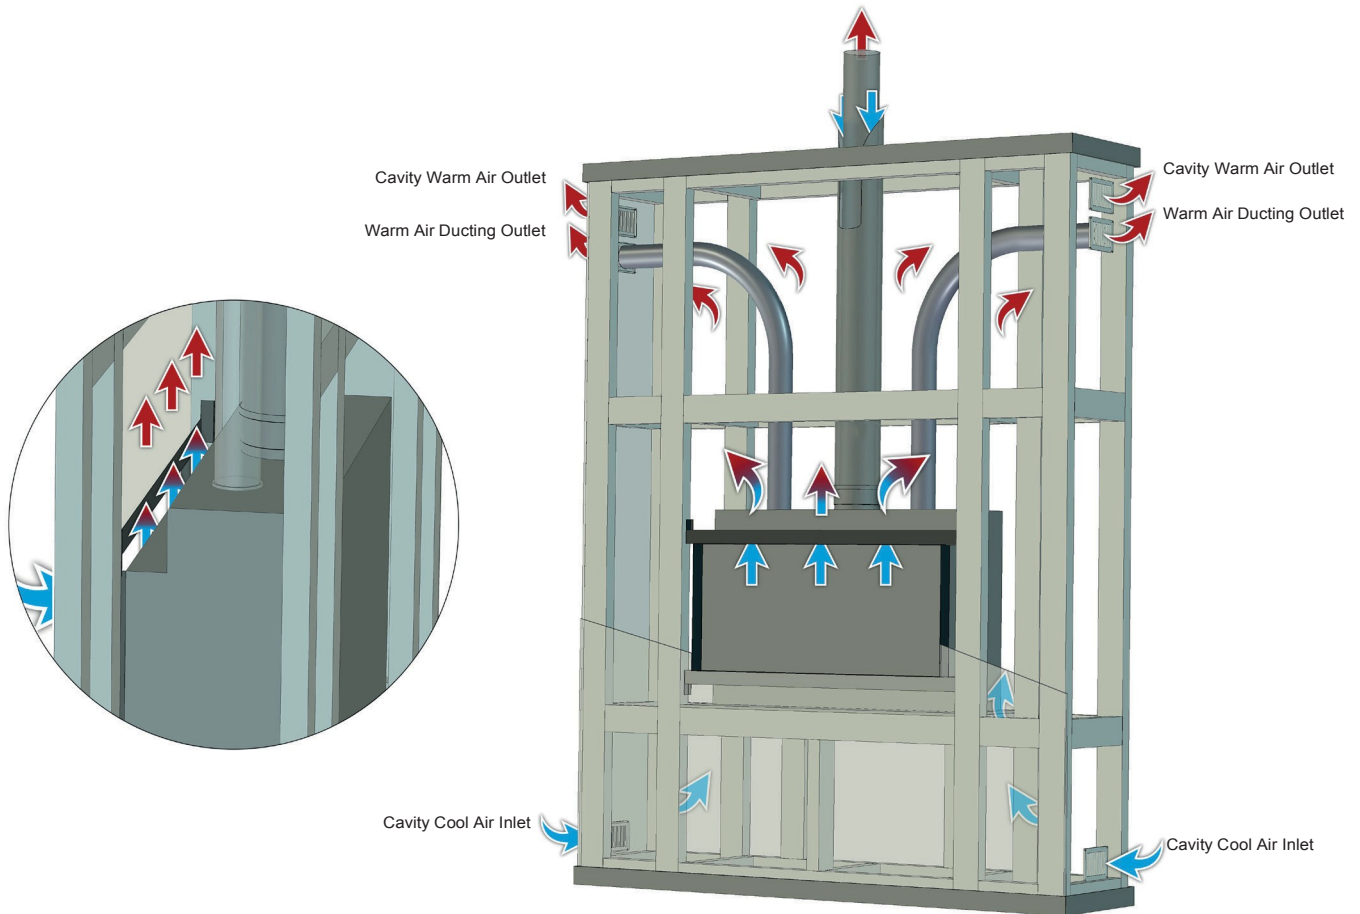

Appliance	Cool Wall Kit Product Code	Trim Frame 20mm Optional Product Code	Trim Frame 50mm Optional Product Code
Studio 2	8727BFCW02	2MSCOOL20	2MSCOOL50
Studio Duplex	8727BFCW02	2MSCOOL20	2MSCOOL50
Studio 3	8727BFCW03	3MSCOOL20	3MSCOOL50


Optional Warm Air Ducting Kit (**Code: 8572**)

Vent Requirements (mm)	Cavity Vent Covers Minimum Requirement	Warm Air Ducting Kit Kit includes: 100mm dia. Ducting, Spigot plus 2 x Vent Covers
Studio 2	2 x 200cm <sup>2</sup> low & 2 x 200cm <sup>2</sup> high	2 x (145mm x 145mm)
Studio Duplex	2 x 200cm <sup>2</sup> low & 2 x 200cm <sup>2</sup> high	2 x (145mm x 145mm) ***
Studio 3	2 x 200cm <sup>2</sup> low & 2 x 200cm <sup>2</sup> high	2 x (145mm x 145mm)

\*\*\* Studio Duplex warm air ducts are fitted to the sides of the appliance, a larger cavity will be required to include this option.

(Please contact The Fireplace to discuss)


## Frame out dimensions for Cool Wall Kit Installation

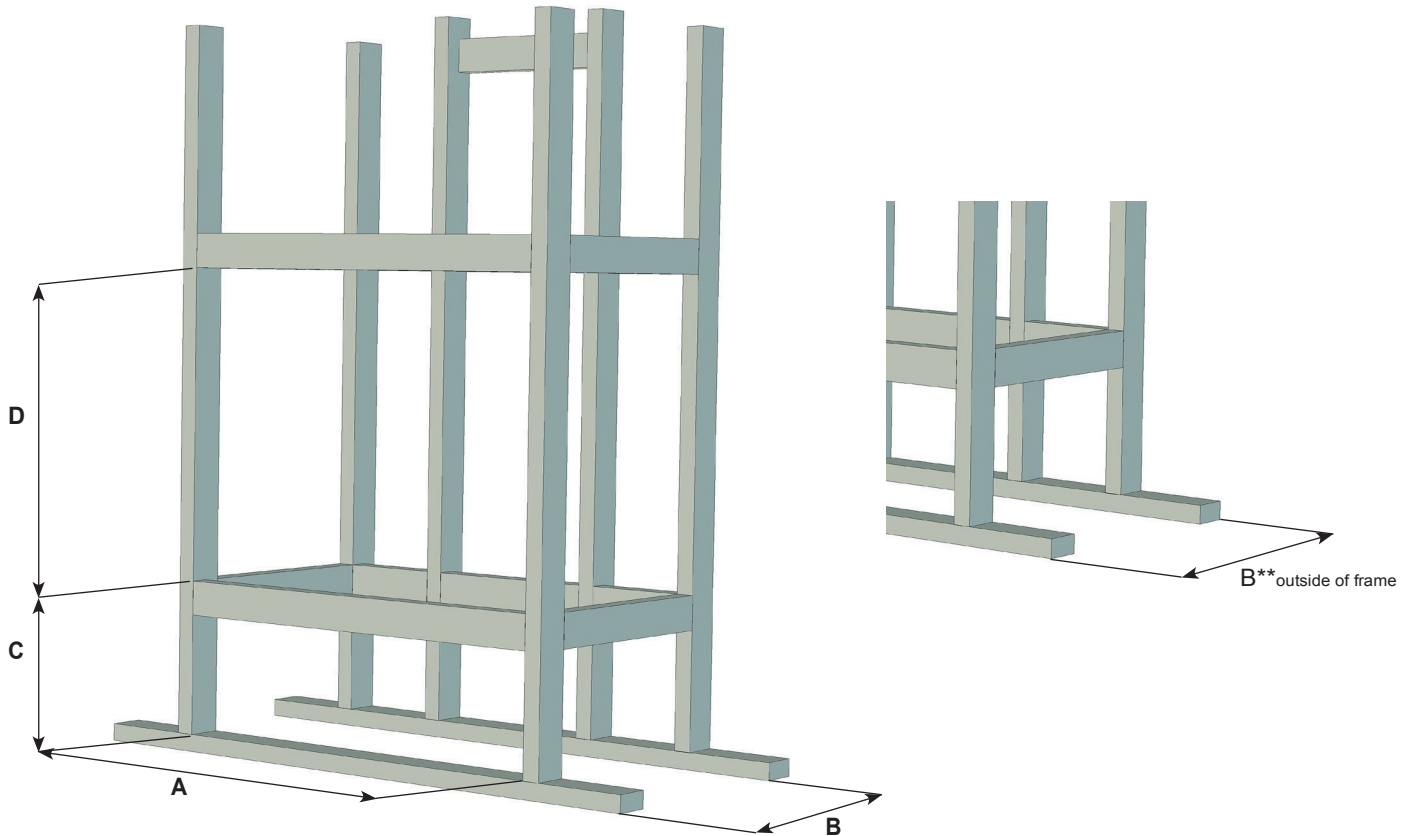


Frame out Requirements (mm)	Cool Wall Kit	Framing Required Width 'A' includes 12mm NCB on side walls & 2mm tolerance	Cavity Minimum Depth 'B'	Base Minimum Height 'C'	Lintel Minimum Height 'D'
Studio 2	1040 x 582 x 62	1068	395	150	947
Studio Duplex	1040 x 582 x 62	1068	465**	150	947
Studio 3	1430 x 582 x 62	1458	395	150	947

### Cool Wall Kit Includes:

- 4 x Metal Frame Lengths (2 x side pieces, 1 x base, 1 x top)
- 6 x Bolts (bolts are for frame to be bolted to the flange of the appliance)
- **Not provided**, 4 screws required to screw frame into non-combustible board and timber framing.

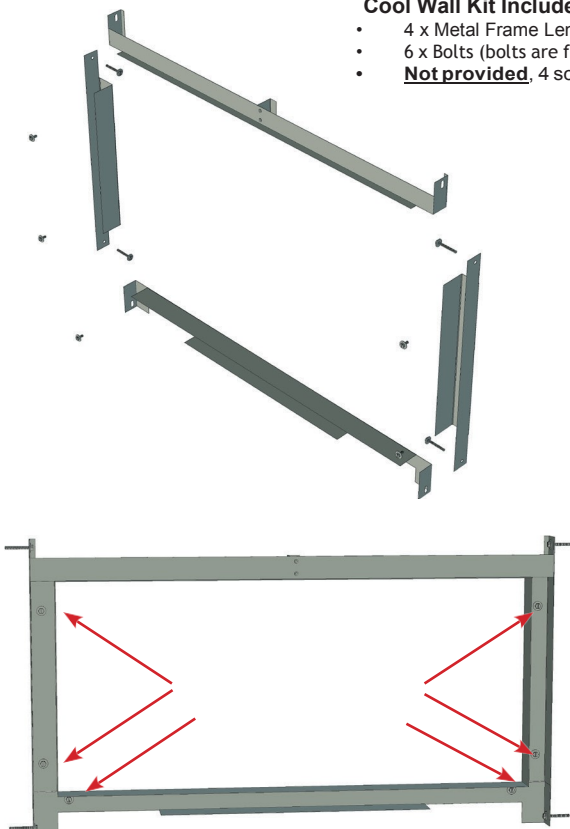

1. Secure the 4 pieces of cool wall kit to the flange of the appliance with the provided bolts first.

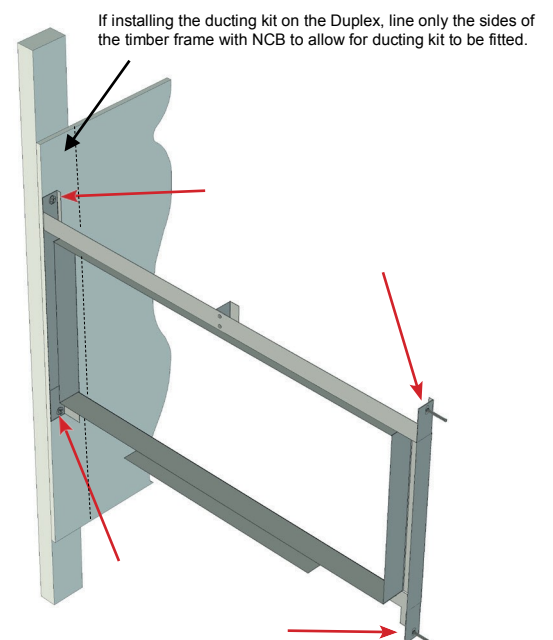

2. Then fix the cool wall kit to the timber framing and 12mm NCB after cool wall kit is fitted to the appliance. If installing ducting kit on the Duplex line only the sides of the timber with NCB as shown.