

Riva Studio

Fitting & Maintenance of the Firebricks

For Inset Convector Cassette and Freestanding models

General Points

THIS ADDENDUM MUST BE ATTACHED TO AND READ IN CONJUNCTION WITH THE INSTALLATION AND USER INSTRUCTIONS FOR:

- Riva Studio Cassette
- Riva Studio Freestanding

Following initial production of the instruction manuals for these products Stovax want to clarify the recommended fitting procedure for the firebricks in order to help fitting and removal during installation and servicing. As a result this addendum has been produced to ensure the advice is understood.

This addendum replaces the advice in the following section:

Fitting the Internal Components

and is an addition to the *Servicing & Maintenance* section.

Fitting of Internal Components - Installation


Once the inner box has been installed the internal components can be fitted.

- 1 **The firebricks must be fitted before the baffle components.**

Firebricks

- 2 The Firebricks and Lower Baffle bricks are supplied in a box for safe transportation. It is advisable to carefully remove all of the bricks from the container in order to correctly identify the various types.
- 3 The side bricks have part of the Log bar supports attached. These must be fitted and removed at the same time as the bricks.

- 4 Install in the following order, see Diagram 1.
Take care when handling and do not force into position.

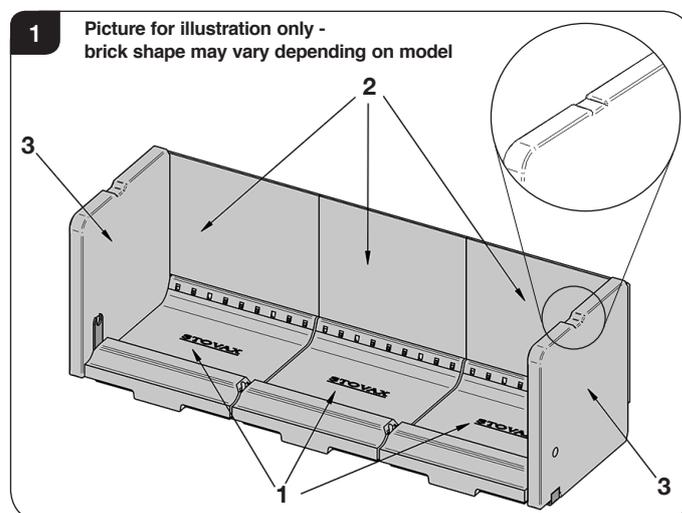



- 5 To do this:

All Models

- Place the base bricks in the firebox (1). Fit the left and right hand base bricks, then the middle.
- Place the back bricks in position on top of the base bricks (2).
- Fit the side bricks (3) with the Log Guard Supports in place. The Log Bar Support holes can be used as a finger hold - follow the method for the relevant model.

Studio 500, 1 & 2


Tilt the brick at an angle and feed the top edge up and into the gap at the top of the firebox. Straighten the brick in this position and lower into the gap between the side of the inner box and the base brick ensuring the Log Bar Support remains in place, see Diagram 2 and 3.

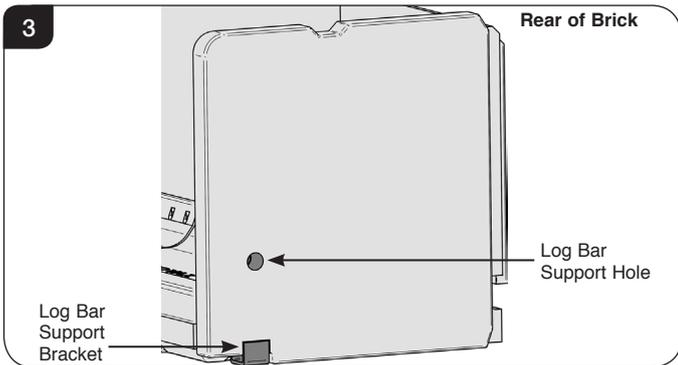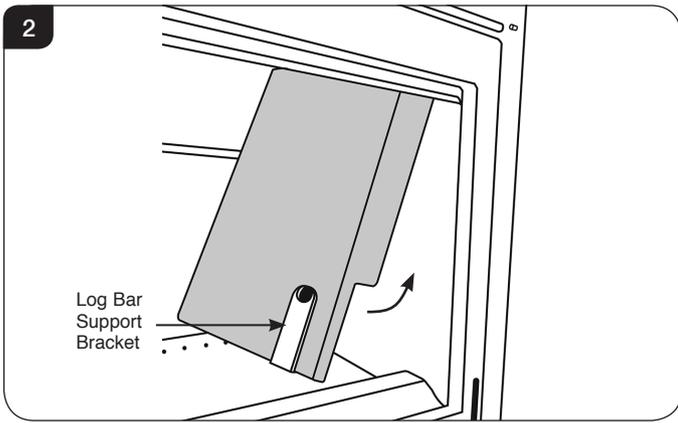

Studio 3

Tilt the brick at an angle and feed the lower edge down into the gap between the base brick and the side of the inner box.

Straighten the brick in this position and drop into place ensuring the Log Bar Support remains in place, see Diagram 3 and 4.

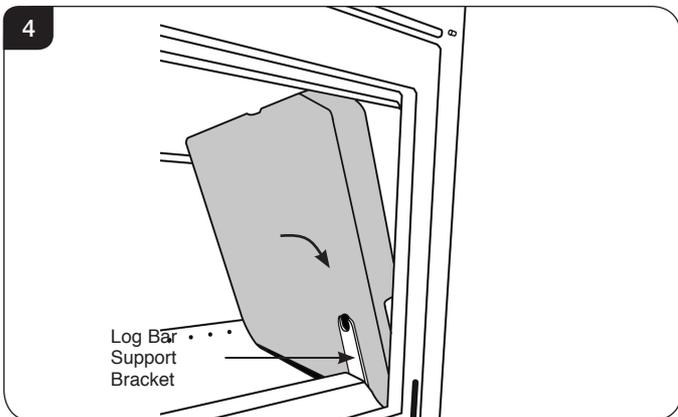

6 Repeat for the other side.

7 Removal is the reverse of this procedure. Allow the appliance to cool fully before removing baffle system.

Do not modify firebricks.
Do not operate with firebricks removed.

Firebricks - Servicing

Depending on the model purchased it may be necessary to remove additional parts of the appliance when servicing to access the firebricks.

Studio 500, 1 & 2

It is possible to remove the firebricks with the Upper Metal Baffle in place.

Remove the following:

Log Guard

- Slide the Log Guard to one side to disengage from the hole in the side brick.
- Raise the free end and remove from the gaps in the base bricks.
- Withdraw from the hole in the other side brick and rotate the Log Guard through the front of the appliance.

Baffle Bricks

Pull the Front Baffle Support off the baffle bricks and move as far forward as possible. Carefully remove the bricks working from the centre outwards.

Angle the Front Baffle Support to free from the firebox.

It is now possible to remove the Firebricks. Lift the side bricks using the Log Guard support slots as finger holds and clear the base bricks; angle the bottom of the side brick towards centre of the firebox and withdraw.

Remove the back bricks, then the base bricks.

Studio 3

It is necessary to remove the Baffle Bricks and the side Upper Metal Baffles before attempting to remove the firebricks to avoid damage, see *Pre-Installation Section*.

Lift the side bricks slightly using the Log Guard support slots as finger holds; tilt the top of the side brick towards centre of the firebox and continue lifting to withdraw.

Remove the back bricks, then the base bricks.

STOVAX

Stovax Ltd, Falcon Road, Sowton Industrial Estate, Exeter, Devon, England EX2 7LF
 Tel: (01392) 474011 Fax: (01392) 219932 E-mail: info@stovax.com www.stovax.com